


Submittal Data: SUBBASE-HW-230V-20A PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES


- Contains factory installed 208/230v 20 amp hardwire whip.
- Provides direct connection between unit and subbase.
- Easy electrical disconnect for maintenance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Multiple electrical knockouts for fast and easy installation.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits

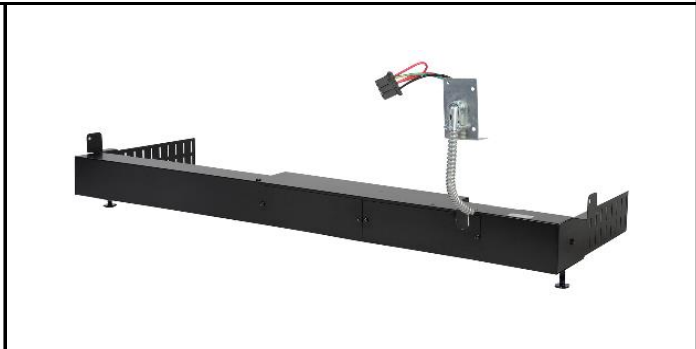

Specifications
Physical: Material: Steel Material Thickness*: 0.0433 to 0.0480-in Color: Black Finish: Powder coated paint <p style="text-align: right;">* including paint.</p> Electrical: Voltage Rating: 208/230v - Current Rating: 20 amp Unit Power Connection: Gree PTAC - Conduit Material: Steel Wire: 12 AWG 600V 105°C 2/64-in thick insulation Wire Colors: Black/Red/Green

Unit Dimensions	
Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions	
Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

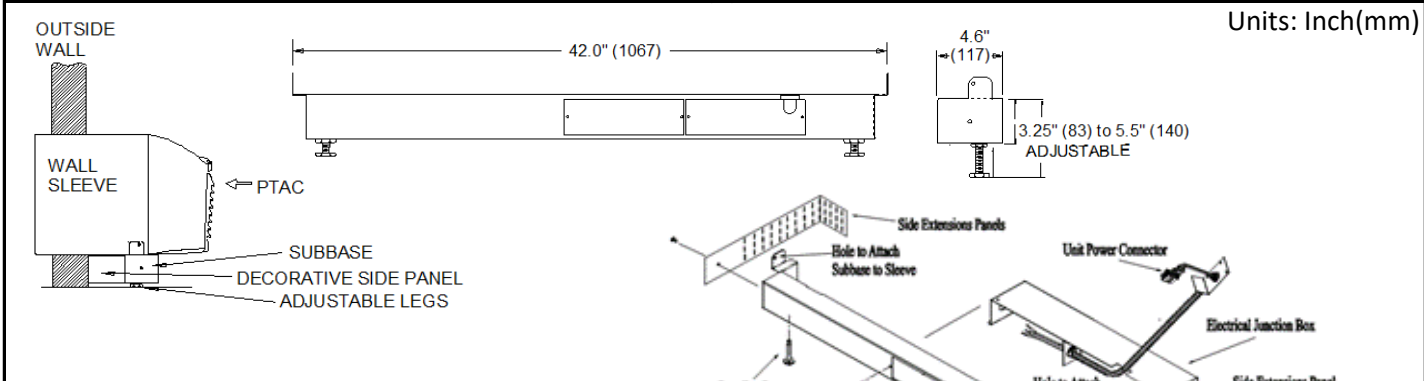

Units: Inch(mm)

- NOTES:**
- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.