

**Submittal Data:**
**PTAC With Universal Heater - 7,000 to 15,000 Cooling w/ Electric Heating Models (Power Cord Required)**
**208/230 & 265 Voltage**

Job Name	Location	Date
Purchaser	Engineer	Phone
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> New Construction <input type="checkbox"/> Revovation Project	
Unit Designation	Schedule No.	

**GENERAL FEATURES**

- Industry Standard Size 42" x 16" - Designed to easily install in most standard wall sleeve (Contractor must verify)
- Electronic Touch Pad - IR Remote Control (Optional)
- Wired, Wireless Wall Thermostat & Energy Management System Interface
- LCDI Power Cord (208/230V Only)
- Condensate Slinger Ring Disposal
- Separate Multi-Speed Indoor & Outdoor Fan Motors
- Dry Mode
- Industry's Longest Standard Warranty, 5 Year Limited Warranty (See Product Catalog For Details)

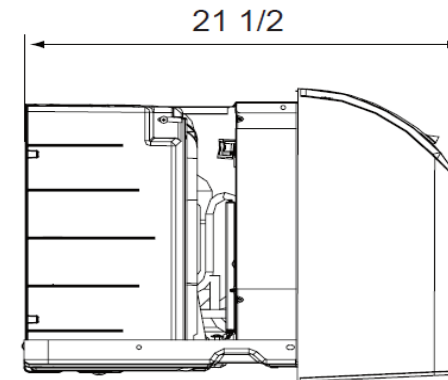
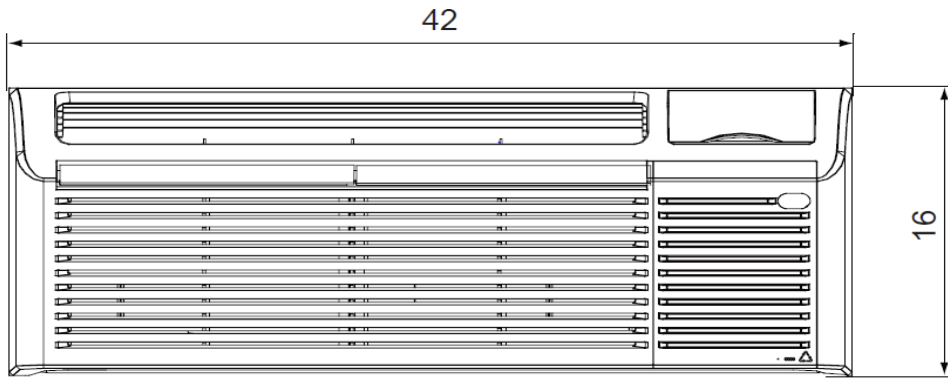

**Performance Specification**

Model Number	Capacity (BTU/H)				Dehumi - dification (Pints/Hr)	Energy Efficiency Ratio (EER)	Sensible Heat Factor	Indoor Fan CFM (Hi/Low)	AHRI Certification Number
	Cooling	Universal Electric Heating							
		2.45 KW	3.45 KW	5.0 KW					
<b>208/230 Volt</b>									
GAE07AE-D3NRNB2G	7,000/7,200	6,800/8,300	9,600/11,700	-	1.69	13.0	86%	312/282	8703480, 8703481
GAE09AE-D3NRNB2G	9,200/9,400	6,800/8,300	9,600/11,700	-	2.11	12.1	85%	329/294	8703482, 8703483
GAE12AE-D3NRNB2G	11,600/11,800	6,800/8,300	9,600/11,700	13,900/17,000	2.75	11.6	75%	341/306	8703485, 8703486, 8703487
GAE15AE-D3NRNB2G	14,200/14,500	6,800/8,300	9,600/11,700	13,900/17,000	3.17	10.4	67%	341/306	8703488, 8703489, 8703490
<b>265 Volt</b>									
GAE07AE-P3NRNB2G	7,200	8,300	11,700	-	1.69	13.0	86%	312/282	9032335, 9032336
GAE09AE-P3NRNB2G	9,400	8,300	11,700	-	2.11	12.1	85%	329/294	8669548, 8669551
GAE12AE-P3NRNB2G	11,800	8,300	11,700	17,000	2.75	11.6	75%	341/306	8934560, 8934561, 8669563
GAE15AE-P3NRNB2G	14,500	8,300	11,700	17,000	3.17	10.4	67%	341/306	8669566, 8669569, 8669572

**Electrical Specification**







Model Number	Voltage	Input Power (Watts)				Current (Amps)				Max Fuse Size (Amps) (Based on Power Cord Selection)
		Cooling	Universal Electric Heating			Cooling	Universal Electric Heating			
			2.45 KW	3.45 KW	5.0 KW		2.45 KW	3.45 KW	5.0 KW	
<b>208/230 Volt</b>										
GAE07AE-D3NRNB2G	208/230	535/550	2,003/2,450	2,821/3,450	-	2.9/2.7	9.7/10.7	13.6/15.0	-	15, 20
GAE09AE-D3NRNB2G	208/230	760/775	2,003/2,450	2,821/3,450	-	3.9/3.7	9.7/10.7	13.6/15.0	-	15, 20
GAE12AE-D3NRNB2G	208/230	1,000/1,015	2,003/2,450	2,821/3,450	4,089/5,000	5.1/4.9	9.7/10.7	13.6/15.0	19.7/21.8	15, 20, 30
GAE15AE-D3NRNB2G	208/230	1,365/1,390	2,003/2,450	2,821/3,450	4,089/5,000	6.7/6.2	9.7/10.7	13.6/15.0	19.7/21.8	15, 20, 30
<b>265 Volt</b>										
GAE07AE-P3NRNB2G	265	550	2,450	3,450	-	2.4	9.3	13.1	-	15, 20
GAE09AE-P3NRNB2G	265	775	2,450	3,450	-	3.3	9.3	13.1	-	15, 20
GAE12AE-P3NRNB2G	265	1,015	2,450	3,450	5,000	4.2	9.3	13.1	18.9	15, 20, 30
GAE15AE-P3NRNB2G	265	1,390	2,450	3,450	5,000	5.4	9.3	13.1	18.9	15, 20, 30

## Dimensional Specifications



## Universal Power Cord Selection

## Receptacle Configuration

Model Number	Voltage	Breaker Size	Electric Heater KW	Minimum Circuit Ampacity	Receptacles Type	NEMA Number	208/230V	265V
PWRCORD-230V-15A	208/203	15	2.45	14	Tandem	6-15P		
PWRCORD-230V-20A	208/203	20	3.45	19	Perpendicular	6-20P		
PWRCORD-230V-30A	208/203	30	5.0	28	Large Tandem	6-30P		
PWRCORD-265V-15A	265	15	2.45	12	265V 15 Amp	7-15P		
PWRCORD-265V-20A	265	20	3.45	17	265V 20 Amp	7-20P		
PWRCORD-265V-30A	265	30	5.0	24	265V 30 Amp	7-30P		

### WARRANTY:

1) PARTS ONLY WARRANTY FOR THE ENTIRE 5 YEAR FROM THE DATE OF ORIGINAL PURCHASE.

